


## Máy Lạnh Chillers R-314a TCW 360 ~ 500NB2D

- Hiệu quả cao làm giảm mất năng lượng.
- Độ rung và mức âm thanh thấp
- Máy nén và bộ trao đổi nhiệt hiệu quả.
- Độ tinh cậY cao và độ bền cao
- Thiết kế nhỏ gọn

[Đặt hàng](#)

# R-134a

TCW-360HB2D  
TCW-400HB2D  
TCW-500HB2D

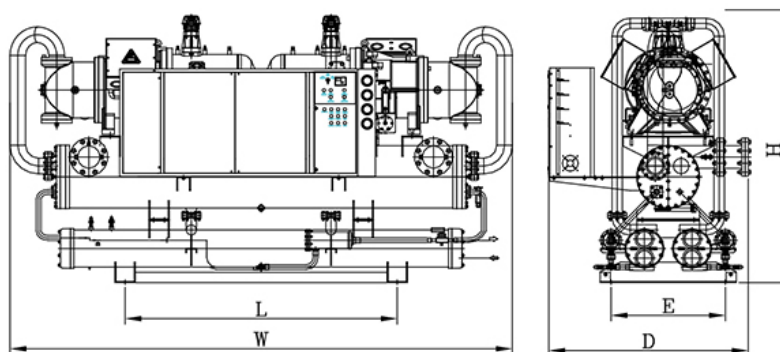

## ■ Specifications

Model		TCW-360HB2D	TCW-400HB2D	TCW-500HB2D
Cooling Capacity	kW	60Hz	1,266	1,406
		50Hz	1,055	1,172
Power Consumption	kW	60Hz	302	335
		50Hz	252	279
Running Current A	3φ 220/380/440V	60Hz	-/527/455	-/585/505
	3φ 220/380/415V	50Hz	-/439/402	-/487/446
COP		W/W	4.19	4.20
Dimension	Height (H)	mm	2,400	2,400
	Width (W)	mm	4,800	4,800
	Depth (D)	mm	1,900	1,900
Foundation holes (L * E)		mm	2,000*1,400	2,000*1,400
Evaporator	Type	Shell and Tube		
	Flow rate	L/min	3,600	4,000
	Lost head	M	6.0	8.0
	Pipe connections		8B	10B
Condenser	Type	Shell and Tube		
	Flow rate	L/min	4,500	5,000
	Lost head	M	6.5	6.6
	Pipe connections		6B*2	6B*2
Refrigerant control		Thermal expansion valve		
Compressor	Type	Semi-hermetic screw		
	Oil heater	W	300*2	300*2
Capacity step		%	0, 25, 50, 75, 100	
Starting method		Y-Δ		
Safety devices		High/Low pressure switch, Over current relay, Phase reversal protector, Relief valve, Thermal interior protector, Antifreeze protector		
Refrigerant		R-134a		
Refrigerant oil		Nameplate in chiller		
Net weight		kg	5,300	5,900
Operation weight		kg	6,350	7,100

Note: 1. Cooling capacity is on: cooling water outlet 35°C, inlet 30 °C; Chilled water outlet 7°C, inlet 12 °C.  
2. Specifications are subject to change with out notice for further improvement.

## **Thông tin liên quan**



—

[Máy Lạnh Chillers R-314a TCW 160 ~ 300NB2D](#)



—

[Máy Lạnh Chillers R-314a TCW 60 ~ 120NB2D](#)



—

[Máy Lạnh Chillers R-314a TCW 120 ~ 150NB1D](#)



—

[Máy Lạnh Chillers R-314a TCW 30 ~ 100NB1D](#)



—

[Máy Lạnh Chillers R-314a TCW 15NBK1D](#)



—

[Máy Lạnh Chillers R-314a TCW 5 ~ 10NBK1D](#)



—

[Máy Lạnh Chillers R-314a TCW 320 ~ 500HB2F](#)



—

[Máy Lạnh Chillers R-314a TCW 180 ~ 300HB2F](#)



-

[Máy Lạnh Chillers R-314a TCW 80 ~ 180HB2F](#)



-

[Máy Lạnh Chillers R-314a TCW 120 ~ 180HB1F](#)



—

[Máy Lạnh Chillers R-314a TCW 40 ~ 100HB1F](#)